
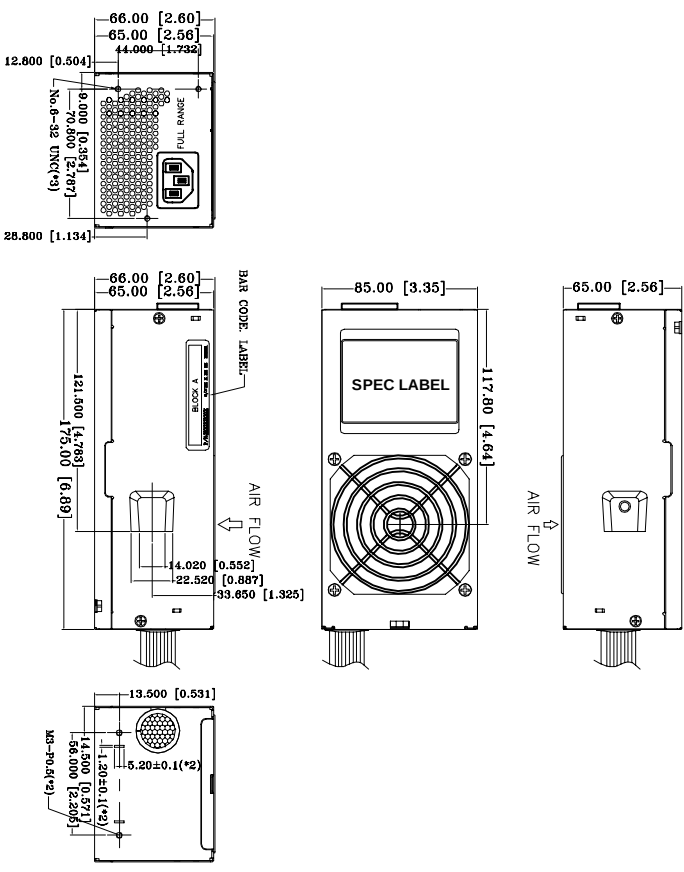


REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR	CABLE LENGTH
P1	1	+3.3VDC	BL/CK	20	WST	350±10mm
/24	2	+3.3VDC	BL/CK	18	+P4-4020K11D-8	
	3	COM	BL/CK	20	+P4-4020K11D-8	
	4	+5VDC	BL/CK	18	or EQUIV.	
	5	COM	BL/CK	20		
	6	+5VDC	BL/CK	18		
	7	COM	BL/CK	20		
	8	PL/CK	BL/CK	24		
	9	+5VDC	BL/CK	20		
	10	+12V	BL/CK	20		
11	+12V	BL/CK	20			
12	+3.3VDC	BL/CK	20			
13	+3.3VDC	BL/CK	20			
14	-12VDC	BL/CK	24			
15	COM	BL/CK	18			
16	PS_ON#	BL/CK	24			
17	COM	BL/CK	18			
18	COM	BL/CK	18			
19	COM	BL/CK	18			
20						
21	+5VDC	BL/CK	20			
22	+5VDC	BL/CK	20			
23	+5VDC	BL/CK	20			
24	COM	BL/CK	18			
P2	1	COM	BL/CK	20	MOLEX	350±10mm
2	COM	BL/CK	20	39-01-2040	or EQUIV.	
3	+12V	BL/CK	20			
4	+12V	BL/CK	20			
P3	1	COM	BL/CK	20	MOLEX	300±10mm
2	COM	BL/CK	20	SD-67582-001	or EQUIV.	
3	+5VDC	BL/CK	20			
4	COM	BL/CK	20			
5	+12V	BL/CK	20			
P4	1	COM	BL/CK	20	MOLEX	150±10mm
2	COM	BL/CK	20	SD-67582-001	or EQUIV.	
3	+5VDC	BL/CK	20			
4	COM	BL/CK	20			
5	+12V	BL/CK	20			
P5	1	COM	BL/CK	20	MOLEX	300±10mm
2	COM	BL/CK	20	SD-67582-001	or EQUIV.	
3	+5VDC	BL/CK	20			
4	COM	BL/CK	20			
5	+12V	BL/CK	20			
P6	1	+12V	BL/CK	20	AMP	300±10mm
2	COM	BL/CK	20	1-480424-0	or EQUIV.	
3	COM	BL/CK	20			
4	+5VDC	BL/CK	20			
P7	1	+12V	BL/CK	20	AMP	150±10mm
2	COM	BL/CK	20	1-480424-0	or EQUIV.	
3	COM	BL/CK	20			
4	+5VDC	BL/CK	20			
P8	1	+5VDC	BL/CK	22	AMP	150±10mm
2	COM	BL/CK	22	171822-4	or EQUIV.	
3	COM	BL/CK	22			
4	+12V	BL/CK	22			
P9	1	+12V	BL/CK	20	WST	400±10mm
2	+12V	BL/CK	20	P8-142002K21B-B	or EQUIV.	
3	+12V	BL/CK	20			
4	COM	BL/CK	20			
5	COM	BL/CK	20			
6	COM	BL/CK	20			
7	COM	BL/CK	20			
8	COM	BL/CK	20			

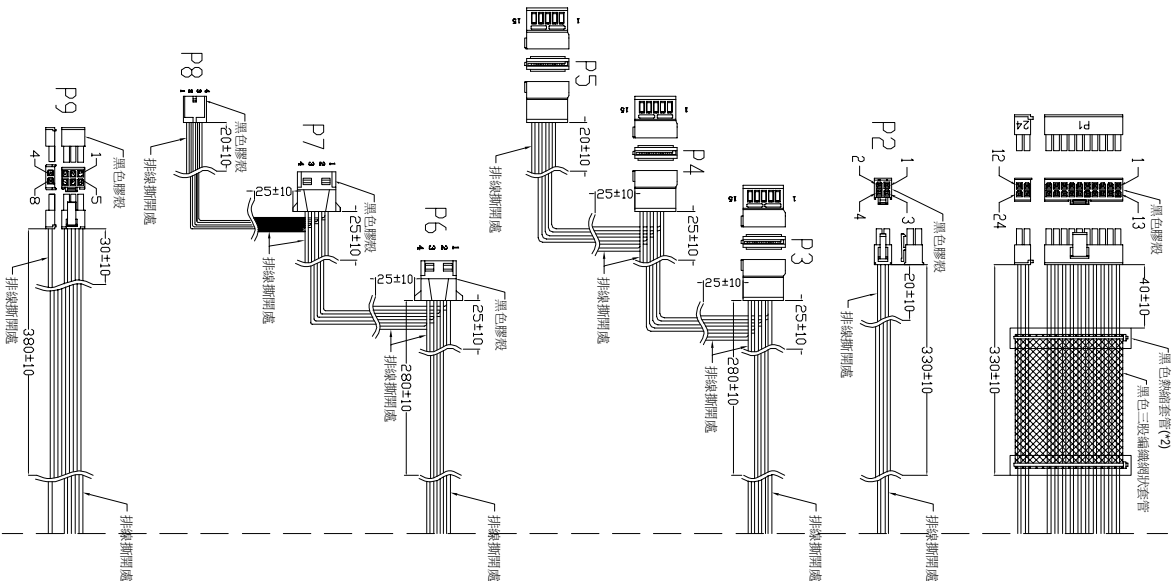

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.
 3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].
 4. 線材P1為UL1007黑色線;其他為UL2468黑色排線.
 5. 風扇網為黑色;CASE及風扇固定螺絲均為黑色螺絲.
 6. 黑色亮面砂漆"处理, 油墨编码 LC13-0509

P/N.:9PA300HK00

MODEL NO. :TFX3B-300W (L290001).	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(8)	PE	DRAWN	DATE
			JAN.17.2020



UNIT:mm [inch]